




# ADSS-AT-24B1.3-100M (Single Jacket)



## CROSS SECTIONAL

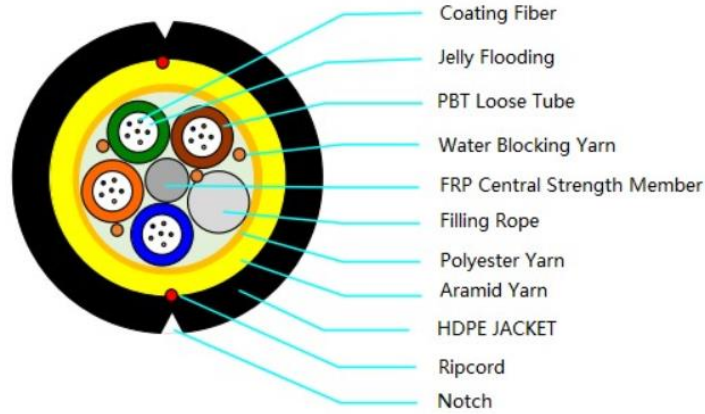

## DIMENSION

Model No.	Core Structure	Loose Tube Dimension ±0.1mm	Centre FRP mm	Outer Jacket Thickness ±0.1mm	Cable Outer Diameter ±0.3mm	Weight kg/km	Drum Package	Drum Dimension mm
ADSS-AT-24B1.3-100M	4 loose tube, 1 filler	1.8	1.5	1.6	9.4	73	4km/盘	1050*320*625

Attenuation: G652D: ≤0.35dB/Km@1310nm、≤0.22dB/Km@1550nm

### Mechanical Environmental Performance

1. Span 100m、wind speed ≤ 15m/s, maximum snow thickness 8mm;
2. The allowable Tension: 3000N;
3. The maximum allowable side pressure: 2200N/100mm;
4. Operating environment -40℃ ~ +70℃ ;
5. Static bending radius 12.5D, dynamic bending radius 25D; (D is diameter)